



A desk top unit designed to provide an aesthetically pleasing yet practical solution for desk top power & data connections. Particularly suited for Hot-desking situations or simply to provide personal desk top power for the general office.

Used in conjunction with underdesk units POD provides a total solution for power and data connectivity at the workstation.

Based on an aluminium extrusion in lengths of up to 4 metres, POD may be used to accommodate mains sockets, data and other connectors as a comprehensive desk top unit to the customers exact specification.



POD may also be configured as a screen or tool rail hung unit with brackets available to suit most types of installation.

Standard colours - Silver anodised body - black fascias and end caps.

Other colours available on request – may be subject to minimum order quantity .



Version: 17.07.2012.



Elsafe Australia Pty Ltd

service - quality - safety


Sydney
Tel: +61 (2) 9454 7500
Fax: +61 (2) 9454 7505
Email: sales@elsafe.com.au

Melbourne
Tel: +61 (3) 9840 1321
Fax: +61 (3) 9840 0159
Email: vic@elsafe.com.au


Brisbane
Tel: +61 (7) 3399 7099
Fax: +61 (7) 3399 9133
Email: qld@elsafe.com.au

www.elsafe.com.au


Common Modular 53mm Components*

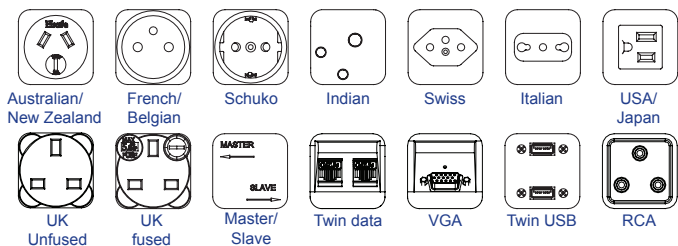

Common Qikfit Components*

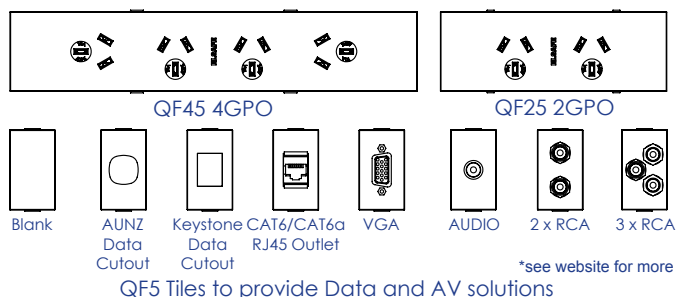

Standard Unit Lengths

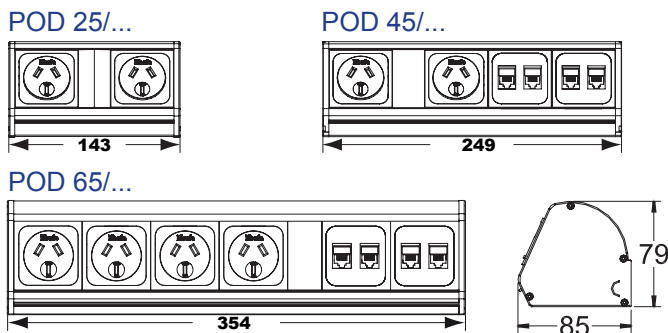

Standard Fixings


- CB Clamp Bracket 18 - 35mm
- TRB Tool rail fixing*
- SLAT Slatwall fixing
- DIN DIN Rail fixing[†]
- FBT Stick down fixing

*Please call to confirm screen/toolrail compatibility
[†]DIN Rail fixing must be specified when ordered

Data fascias allow data cabling to pass straight through POD, ensuring the integrity of cables which have a minimum bend radii (CAT5e, CAT6, etc)

CB - Clamp Bracket

Clamps are available for desk thicknesses between 18mm and 35mm



Features

Configuration:

Power only / Data only / Combined (Power & Data/AV)
 Internal segregation between Power and Data/AV in combined POD units

Increased flexibility

- All PODs are supplied with cables exiting the rear. However, side exit facility is available on all units through a snap-out endcap. Side exit choice can be taken on site and does not require disassembly of POD

Security:

ANTI-FLEX system: Unique full length locking system guarantees unit integrity regardless of length

Testing:

100% testing - continuity, polarity, insulation & earth

Soft Wiring (power)


Power hardwired to Wieland GST connector allows starter cables to be changed to suit requirements, especially useful during moves and changes (CHURN)

Soft Wired Data / AV

As well as soft-wired power, POD can be supplied with pre-fabricated (100% end-of-line tested) flyleads for data (CAT5e, CAT6, CAT7) and AV connections thereby providing a complete 'plug-and-play' soft wiring solution. If necessary, branded data can be accommodated to retain full channel warranties, please call for advice (see our Soft Wiring Data Brochure)


Soft Fixing

POD is designed to allow brackets to be changed on-site. Unless stated otherwise, POD can simply be moved (using the same bracket) or attached to another feature on the desk simply by changing the bracket



TRB - Screen Fixing

Standard tool-rail bracket fits most tool-rails. Please call for confirmation POD does not require any Bracket for 'SLATWALL'



DIN Rail Fixing

DIN-Rail fixing can be used for desk-top, underdesk, or screen mounting to prevent

Custom brackets available on application Version: 17.07.2012.

