













Taking up less than 80mm of desk space polarBEACON can be mounted either directly on the surface or through a standard 80mm grommet hole. Super cool all in white BEACON allows the user easy access to power and data. Used in conjunction with underdesk cable management BEACON offers a total workstation solution

For further information please contact Office Electrics.

#### Overseas model shown



\*Beacon is **not** a retractable unit

Version: 07.05.2014.



# **Elsafe Australia Pty Ltd**

**Sydney**Tel: +61 (2) 9454 7500
Fax: +61 (2) 9454 7505
Email: sales@elsafe.com.au

Melbourne

Tel: +61 (3) 9840 1321 Fax: +61 (3) 9840 0159 Email: vic@elsafe.com.au Brisbane

Tel: +61 (7) 3399 7099 Fax: +61 (7) 3399 9133 Email: qld@elsafe.com.au

www.elsafe.com.au

service - quality - safety

# technical

# **Common Modular Components\***





Chinese









Australian/

Japan






Italian





\*See website for more

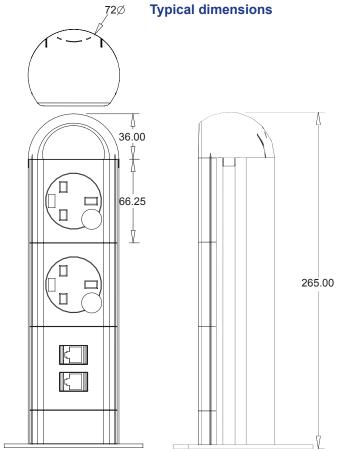

other configurations available, please call sales

## **Features**

# **Configuration**:

Power only / Data only / Combined (Power & Data/AV) Internal segregation between Power and Data/AV in combined BEACON

#### Insulation:

Earthed aluminium casing with fire retardant ABS fascias.

**Fusing**: (to enable compliance to BS6396) 5 x 20mm anti-surge ceramic fuses, with colour-coded fuseclips to denote the rating (3.15A/5A)

# Increased flexibility:

BEACON can be fitted to either the desktop via an 80mm access hole or directly to the surface, or even the underside of the desk therefore leaving the desk surface completely clear.

# Testing:

100% testing - continuity, polarity, insulation & earth **Soft Wiring (power)** 

Power hardwired to Wieland ST/GST connector allows starter cables to be changed to suit requirements, especially useful during moves and changes (CHURN)

## **Soft Wired Data**

As well as soft-wired power, BEACON can accommodate soft wired data. Using our inline couplers, data cables can be changed "on-site" to accommodate changes in length often associated with churn.

\*Beacon is not a retractable unit

Version: 17.07.2012.

