



PAGODA is a stylish new solution from office electrics for supplying user accessible AC power, USB charging, data and AV connections to the conference table.

Not just stylish and functional but quick to install; PAGODA simply clamps to a standard 80mm grommet hole.

It's high quality finish defines PAGODA; the single piece curved top available in brushed stainless steel.

Specify PAGODA with one of our LED feature lighting options for an even more distinctive look.

As standard PAGODA is supplied with 2 x 4 gang POWERUNITS for power outlets and 3 keystone apertures (for data/AV outlets) and VGA and Audio in each end of the unit respectively. Blank ends are available if data and/or AV are not required.



service - quality - safety

Elsafe, Unit 1, 9 Rodborough Road,
Frenchs Forest NSW 2086, Australia
Tel: +61 2 9454 7515 Fax: +61 2 9454 7505
Email: sales@elsafe.com.au www.elsafe.com.au


office electrics

1 Calder Point, Monckton Road Industrial Estate,
Wakefield, West Yorkshire, WF2 7AL
Tel: +44 (0) 1924 367255 Fax: +44 (0) 1924 290652
Email: sales@office-electrics.co.uk www.office-electrics.com


Modular components for PAGODA




UK fused



UK unfused



schuko



french/belgian



australia



china



danish



twin USB fast charger

Keystone components



RJ45



RCA/Audio





USB 2.0/3.0



HDMI


Other components are available. Please see online for details

Technical details

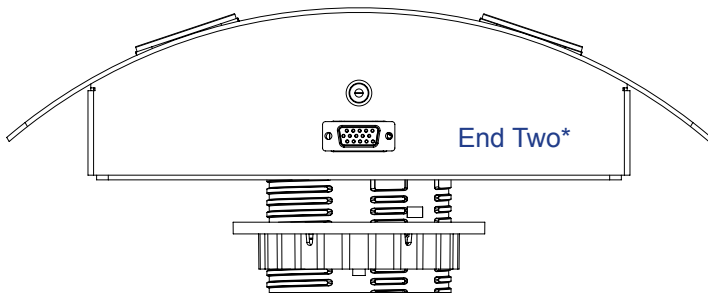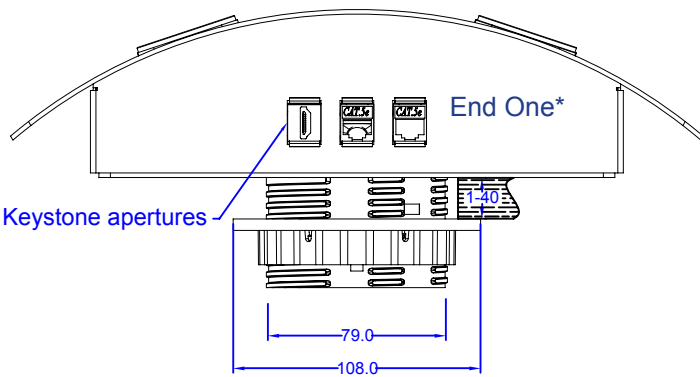

*Blank ends are also available

Cutout Dimensions

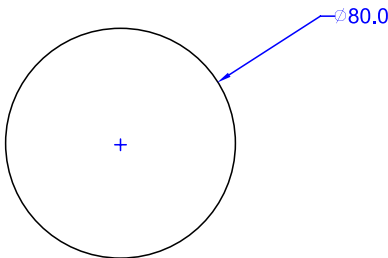

Features

Configuration:

Power only / Data only / Combined (Power & Data/AV)
Internal segregation between Power and Data/AV in combined PAGODA

Insulation:

Earthed steel casing with two self enclosed fire retardant ABS Powerunits.

Earth Bonding:

A rewirable external earth terminal allows the removal/change of earth bonding leads without dismantling the unit.

Fusing: (to enable compliance to BS6396)

5 x 20mm anti-surge ceramic fuses, with colour-coded fuseclips to denote the rating (3.15A/5A)

Testing:

100% testing - continuity, polarity, insulation & earth

Soft Wiring (power):

Power hardwired to wieland GST connector allows starter cables to be changed to suit requirements, especially during moves or changes (CHURN)

Soft Wired Data:


As well as soft-wired power, PAGODA can accommodate soft wired data. Using our inline couplers, data cables can be changed "on-site" to accommodate changes in length often associated with churn

LED feature lighting:

Optional red, blue or green 12V LED strips with internal LED driver.

Installation:

PAGODA fits to a standard 80mm grommet hole in table tops up to 35mm deep, using the supplied clamp 80 kit. Silicone rubber feet prevent damage to table surfaces.

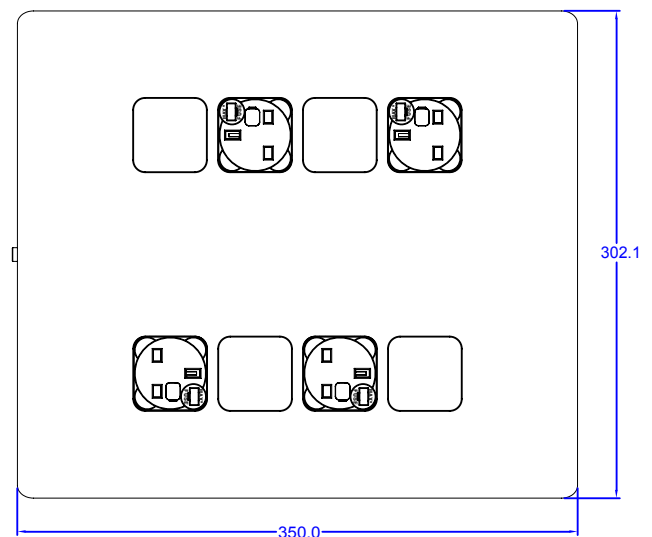

*All measurements are in millimeters



service - quality - safety

Elsafe, Unit 1, 9 Rodborough Road,
Frenchs Forest NSW 2086, Australia
Tel: +61 2 9454 7515 Fax: +61 2 9454 7505
Email: sales@elsafe.com.au www.elsafe.com.au

01.10.2013
office electrics

1 Calder Point, Monckton Road Industrial Estate,
Wakefield, West Yorkshire, WF2 7AL
Tel: +44 (0) 1924 367255 Fax: +44 (0) 1924 290652
Email: sales@office-electrics.co.uk www.office-electrics.com